



N-type i-TOPCon Bifacial Dual Glass
MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXNEG9RC.27

POWER RANGE: 415-445W

445W

MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

22.3%

MAXIMUM EFFICIENCY

25 Years **PRODUCT WARRANTY**

30 Years **POWER WARRANTY**



Small in size, bigger on power

- Up to 445W, 22.3% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



Transparent Dual-glass Design

- Transparent design with aesthetics appearance, 3.2% transparency
- Upgraded dual glass of Vertex S, less prone to micro-cracks and scratches on the back during installation
- Fire Class rating C




Ultra-low Degradation, longer warranty, higher output

- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 30 years power warranty




Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load

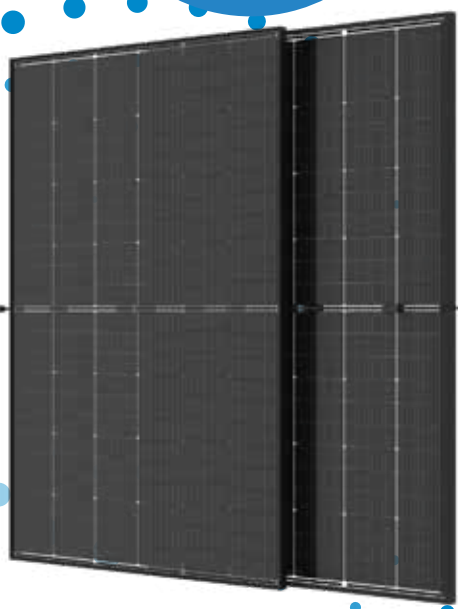

Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

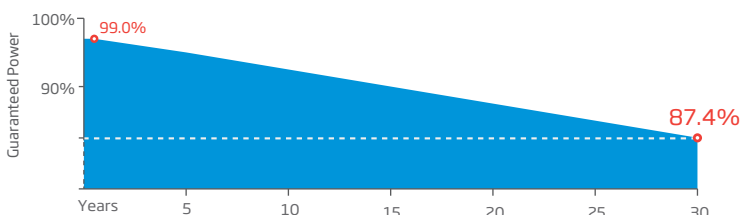



Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System



DIMENSIONS OF PV MODULE(mm)

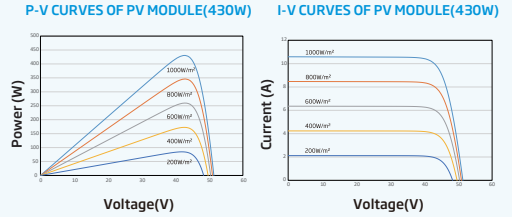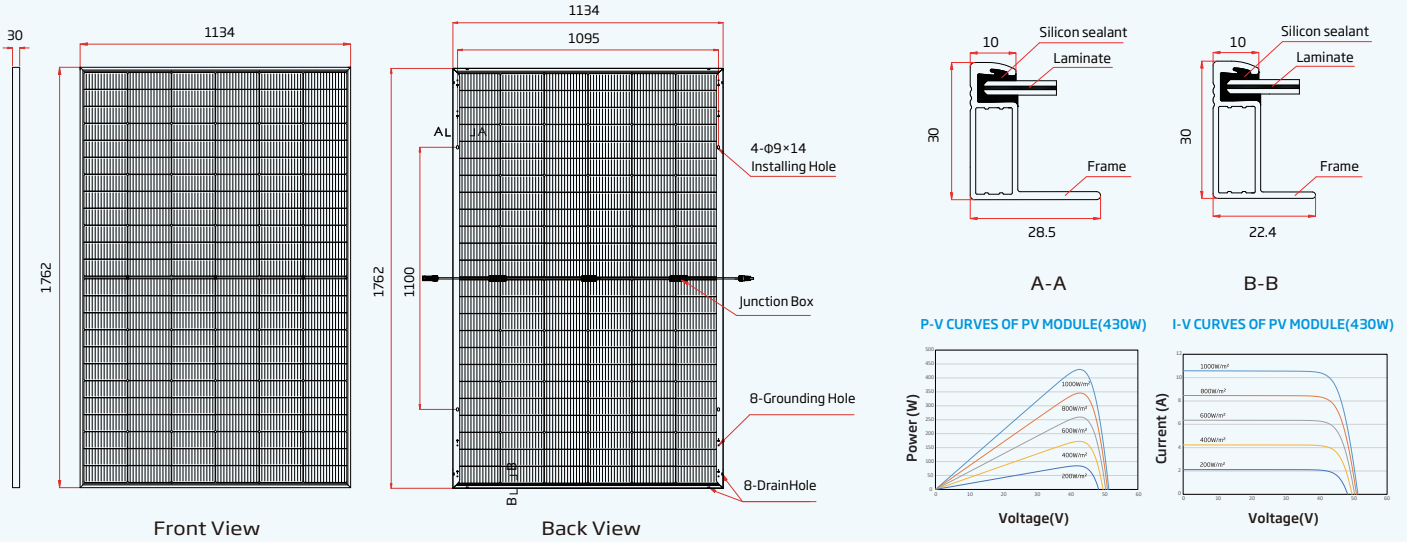

MECHANICAL DATA

Solar Cells	N -type Monocrystalline
No. of cells	144cells
Module Dimensions	1762×1134×30 mm (69.06×43.15×1.18 inches)
Weight	21.0kg (46.30 lb)
Front Glass	1.6 mm (0.06 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6 mm (0.06 inches), High Transmission, Heat Strengthened Glass

Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²) Portrait: 1100MM/1100 mm(43.3/43.3inches)
Connector	Stabuli MC4 EVO2

ELECTRICAL DATA (STC & NOCT&BNPI) TSM-XXXNEG9RC.27(XXX=415-445)

Testing Condition	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
Peak Power Watts- P_{MAX} (Wp)*	415	317	460	420	321	465	425	325	471	430	328	476	435	332	482	440	336	488	445	338	493
Binning Tolerance- P_{MAX} (W)	0 ~ +5																				
Maximum Power Voltage- V_{MPP} (V)	42.1	39.3	42.1	42.5	39.7	42.5	42.9	40.0	42.9	43.2	40.4	43.2	43.6	40.7	43.6	44.0	41.0	44.0	44.3	41.3	44.3
Maximum Power Current- I_{MPP} (A)	9.86	8.03	10.92	9.89	8.07	10.95	9.92	8.09	10.98	9.96	8.11	11.03	9.99	8.15	11.05	10.01	8.17	11.08	10.05	8.20	11.13
Open Circuit Voltage- V_{OC} (V)	50.1	47.6	50.1	50.5	47.9	50.5	50.9	48.3	50.9	51.4	48.8	51.4	51.8	49.2	51.8	52.2	49.5	52.2	52.6	49.9	52.6
Short Circuit Current- I_{SC} (A)	10.50	8.46	11.63	10.53	8.49	11.67	10.56	8.51	11.70	10.59	8.53	11.73	10.64	8.57	11.79	10.67	8.60	11.82	10.71	8.63	11.87
Module Efficiency η_m (%)	20.8		21.0		21.3		21.5		21.8		22.0		22.3								

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s. BNPI: Irradiance at 1000W/m² × 135W/m², Air Mass AM1.5, Temp 25°C *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 5% & 10% backside power gain)

Backside Power Gain	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Total Equivalent power - P_{MAX} (Wp)	436	457	441	462	446	468	452	473	457	479	462	484	467	490		
Maximum Power Voltage- V_{MPP} (V)	42.1	42.1	42.5	42.5	42.9	42.9	43.2	43.2	43.6	43.6	44.0	44.0	44.3	44.3		
Maximum Power Current- I_{MPP} (A)	10.35	10.85	10.38	10.88	10.42	10.91	10.46	10.96	10.49	10.99	10.51	11.01	10.55	11.06		
Open Circuit Voltage- V_{OC} (V)	50.1	50.1	50.5	50.5	50.9	50.9	51.4	51.4	51.8	51.8	52.2	52.2	52.6	52.6		
Short Circuit Current- I_{SC} (A)	11.03	11.55	11.06	11.58	11.09	11.62	11.12	11.65	11.17	11.70	11.20	11.74	11.25	11.78		

Power Bifaciality: 80±7%; ρ_{Pmax} : 80%±7%; ρ_{Voc} : 100%±3%; ρ_{Isc} : 80%±7%

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.29%/°C
Temperature Coefficient of V_{OC}	-0.24%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+70 °C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	25A

WARRANTY

25 year Product Workmanship Warranty**
30 year Power Warranty
1% first year degradation*

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces

0.4% Annual Power Attenuation*
(**Please refer to Limited Warranty Supplement that applies to the TSM-***NEG9R.2B, TSM-***NEG9R.27, Products supplied after 1st Jan 2023 and installed within Australia & New Zealand rooftop market.)
(*Power degradation values above apply to frontside, refer to product warranty for power degradation for backside and other details)